


## POWAFLEX EASY SLIDE AND CLEAN FUEL AND OIL DELIVERY HOSE

For the transfer of petroleum based products with up to 50% aromatic content. Special ESC cover is easy to keep clean, easy to slide, low friction and less drag.

- > Tube: black conductive NBR
- > Reinforcement: high tensile textile cords and anti-static copper wire
- > Cover: black rubber blend with ESC high abrasive coating, chemical, petroleum & ozone resistant
- > Temperature range: -30°C to +85°C
- > Coil lengths: 20 metres, 40 metres, 60 metres

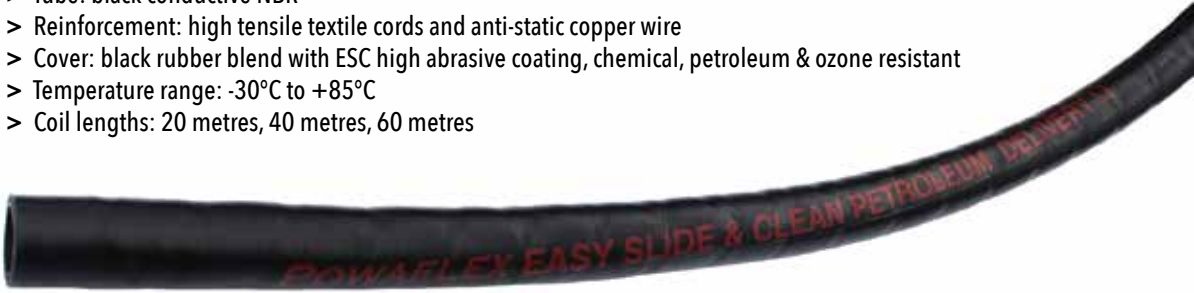

PART No.	I.D. INCH	I.D. MM	O.D. MM	W.P. PSI	WEIGHT KG/MTR
PRODESC25	1"	25	35	150	0.55
PRODESC32	1¼"	32	43	150	0.65
PRODESC38	1½"	38	50	150	0.70
PRODESC51	2"	51	64	150	0.85
PRODESC76	3"	76	90	150	1.10
PRODESC102	4"	102	117	150	2.00