


POWAFLEX FUEL OIL SUCTION AND DELIVERY HOSE

For the transfer of fuel oil suction and delivery with up to 50% aromatic content. Also suitable on hydraulic systems such as hydraulic oil return lines. > Tube: NBR black conductive > Reinforcement: high tensile textile cords, steel wire helix with anti-static copper wire > Cover: CR/NBR/PVC blend, black, abrasion and ozone resistant > Temperature range: -30°C to +90°C > Coil lengths: 20 metres, 40 metres, 60 metres

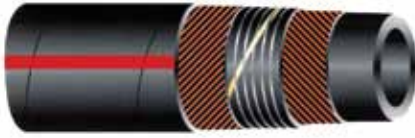

PART No.	I.D. INCH	I.D. MM	O.D. MM	W.P. PSI	WEIGHT KG/MTR
PROS19	3/4"	19	29	150	0.70
PROS22	7/8"	22	30	150	0.72
PROS25	1"	25	35	150	0.75
PROS32	1 1/4"	32	42	150	0.90
PROS35	1 3/8"	35	46	150	1.10
PROS38	1 1/2"	38	49	150	1.20
PROS42	1 5/8"	42	55	150	1.30
PROS45	1 3/4"	45	56	150	1.41
PROS51	2"	51	62	150	1.50
PROS55	2 3/16"	55	68	150	1.89
PROS60	2 3/8"	60	73	150	2.00
PROS63	2 1/2"	63	76	150	2.10
PROS76	3"	76	89	150	2.70
PROS90	3 1/2"	90	105	150	3.10
PROS102	4"	102	116	150	3.70