

QUICK RELEASE COUPLINGS

QJV / QJB



Steel - Trivalent Plated

APPLICATIONS

Designed for use in high pressure jacking applications where cylinders, jacks and rescue equipment are connected to pumps.



FEATURES

Threaded sleeve connection method
Poppet valve for improved sealing

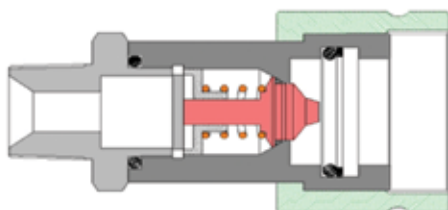


TECHNICAL

Coupler Body - Steel, Trivalent Plated
Poppet Type Valve
Seals - Nitrile (Buna N) with PTFE backup ring
Temperature Range: -25C to +125C

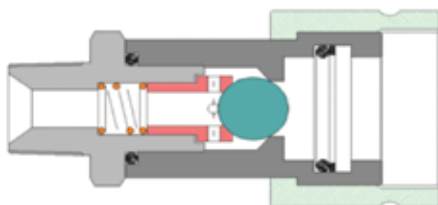

PERFORMANCE

Test Fluid: Hydraulic Oil at 100°F

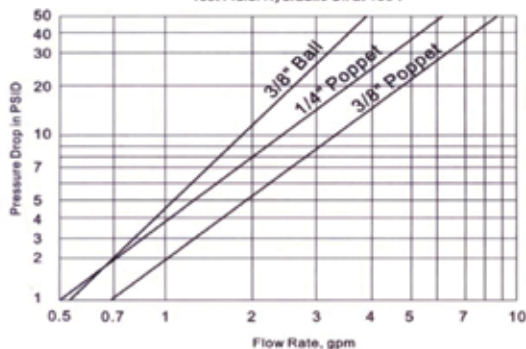

Screw Connect Jack Couplings



Coupler	Body Size	Thread			W.P. (Bar)
			T	Dash	
QJV-04F	1/4"	NPT	1/4"	-04	700
QJV-06F	3/8"	NPT	3/8"	-06	700

Male Tip	Body Size	Thread			W.P. (Bar)
			T	Dash	
QJV-04M	1/4"	NPT	1/4"	-04	700
QJV-06M	3/8"	NPT	3/8"	-06	700

INTERCHANGE

This range interchanges with:
Faster PVVM, Parker 3000, Safeway S30
DNP PVM, Hansen WA56000

Coupler	Body Size	Thread			W.P. (Bar)
			T	Dash	
QJB-04F	1/4"	NPT	1/4"	-04	700
QJB-06F	3/8"	NPT	3/8"	-06	700

Male Tip	Body Size	Thread			W.P. (Bar)
			T	Dash	
QJB-04M	1/4"	NPT	1/4"	-04	700
QJB-06M	3/8"	NPT	3/8"	-06	700

INTERCHANGE

This range interchanges with:
Faster PVVM, Parker 3000, Safeway S30
DNP PVM, Hansen WA56000

DUST CAPS and PLUGS



Dust Plug		Dust Cap	
QJDP		QJDC	

QUICK RELEASE COUPLINGS



INTERCHANGE CHART

PART NO		INTERCHANGE								
Series	Page	Faster	Parker	Aeroquip	Safeway	DNP	Ryco	Stucchi	Hansen	Tema
QTC	C.02							IRH		T
QOV	C.03	NV	4000	FD42	S20	PDV	R80	IR		
QOB	C.04	NS	4000	FD42	S20	PDS	R91	IR		
QAV	C.05	ANV	6600	FD56	S56	PAV	R82	BIR	HA15000	IA
QAVP	C.03	CNV/CPV	4200				R81-P	IRS-V		
QABP	C.04									
QAVSS	C.06	ANV	6600	FD56	S56	PAVX		BIR	HA15000	
QBV	C.07	HNV	60	FD45	S10	PBVM		IRB	HK	IB
QBVBR	C.08	HNV	60	FD45	S10	PBVM		IRBO	HK	IB MPX
QJV/QJB	C.09	PVVM	3000		S30	PVM	R100	IVHP	WA56000	
QFF	C.10	2FFI	FE	FD89	S56	PLT4	R110	FIRG	QA29000	IF

Quality Quick Release couplings for
Agriculture
Industry
Construction
Earth Moving