


LEGRIS FILTER REGULATORS & LUBRICATORS

AIR SERVICE UNITS - SERIES STANDARD


6700 Filter/Regulator 1 unit

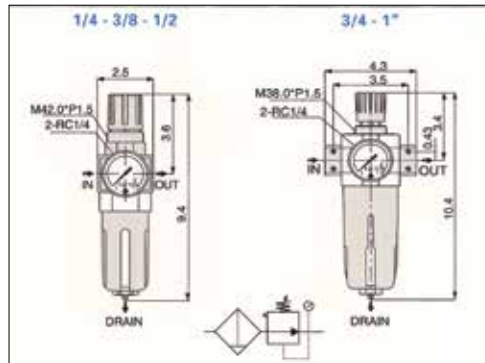

Specification

Threaded port (BSPP)	1/4	3/8	1/2	3/4	1"
Maximum flow rate (NI/min)	2100	2130	2750	8000	8500
Filter bowl capacity (cc)	105	105	105	210	210
Lubricator oil	ISO - VG32 recommended (or equivalent)				
Weight (kg)	0,930	0,930	0,930	1,360	1,360

Flow charts

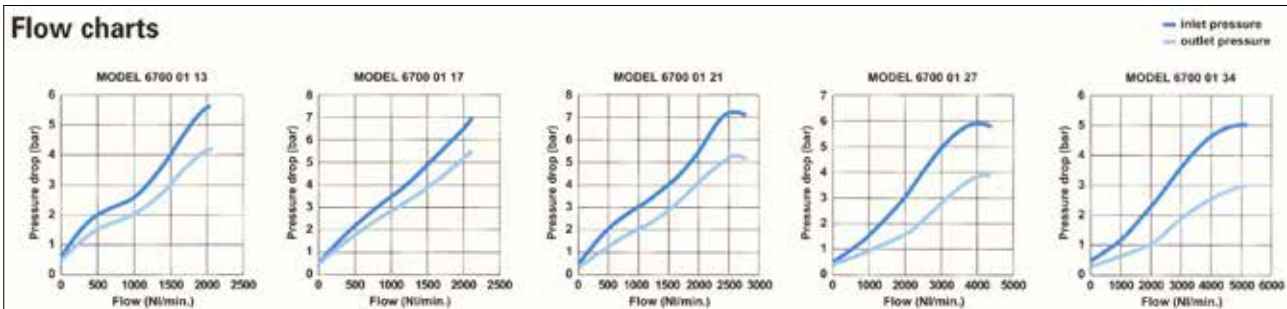

PORT	DRAIN	FILTER MICRON	PART No.	
1/4"	Manual	5μ	6700 01 13	Standard
1/4"	Manual	40μ	6700 41 13	Option
1/4"	Semi Auto	5μ	6700 03 13	Option
1/4"	Semi Auto	40μ	6700 43 13	Option
3/8"	Manual	5μ	6700 01 17	Standard
3/8"	Manual	40μ	6700 41 17	Option
3/8"	Semi Auto	5μ	6700 03 17	Option
3/8"	Semi Auto	40μ	6700 43 17	Option
1/2"	Manual	5μ	6700 01 21	Standard
1/2"	Manual	40μ	6700 41 21	Option
1/2"	Semi Auto	5μ	6700 03 21	Option
1/2"	Semi Auto	40μ	6700 43 21	Option
3/4"	Manual	5μ	6700 01 27	Standard
3/4"	Manual	40μ	6700 41 27	Option
3/4"	Semi Auto	5μ	6700 03 27	Option
3/4"	Semi Auto	40μ	6700 43 27	Option
1"	Manual	5μ	6700 01 34	Standard
1"	Manual	40μ	6700 41 34	Option
1"	Semi Auto	5μ	6700 03 34	Option
1"	Semi Auto	40μ	6700 43 34	Option

Also available on request: threaded ports 1 1/2" and 2".

Ready to be mounted

The products are delivered with following accessories:

- 1 gauge
- 1 bracket (sizes 1/4, 3/8, 1/2) or 2 brackets (sizes 3/4, 1").
- 4 screws
- 1 plug

