


LEGRIS FILTER REGULATORS & LUBRICATORS

AIR SERVICE UNITS - SERIES STANDARD


6707 Filter/Regulator - Lubricator 2 units

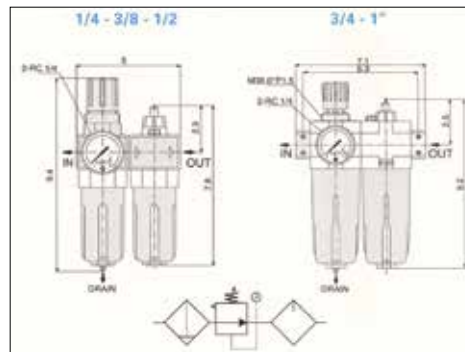

Specification

Threaded port (BSPP)	1/4	3/8	1/2	3/4	1"
Maximum flow rate (NI/min)	2080	2100	2600	7940	8200
Filter bowl capacity (cc)	105	105	105	210	210
Lubricator oil	ISO - VG32 recommended (or equivalent)				
Weight (kg)	1,480	1,480	1,480	2,150	2,150

Flow charts

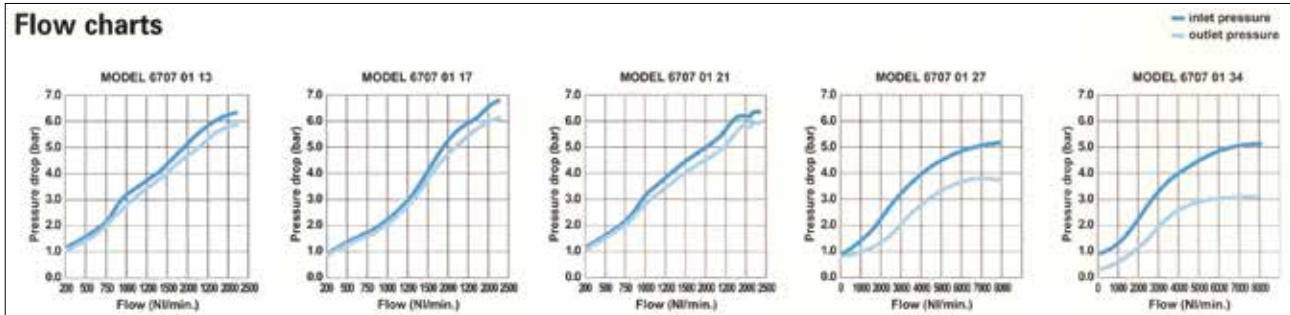

PORT	DRAIN	FILTER MICRON	PART No.	
1/4"	Manual	5μ	6707 01 13	Standard
1/4"	Manual	40μ	6707 41 13	Option
1/4"	Semi Auto	5μ	6707 03 13	Option
1/4"	Semi Auto	40μ	6707 43 13	Option
3/8"	Manual	5μ	6707 01 17	Standard
3/8"	Manual	40μ	6707 41 17	Option
3/8"	Semi Auto	5μ	6707 03 17	Option
3/8"	Semi Auto	40μ	6707 43 17	Option
1/2"	Manual	5μ	6707 01 21	Standard
1/2"	Manual	40μ	6707 41 21	Option
1/2"	Semi Auto	5μ	6707 03 21	Option
1/2"	Semi Auto	40μ	6707 43 21	Option
3/4"	Manual	5μ	6707 01 27	Standard
3/4"	Manual	40μ	6707 41 27	Option
3/4"	Semi Auto	5μ	6707 03 27	Option
3/4"	Semi Auto	40μ	6707 43 27	Option
1"	Manual	5μ	6707 01 34	Standard
1"	Manual	40μ	6707 41 34	Option
1"	Semi Auto	5μ	6707 03 34	Option
1"	Semi Auto	40μ	6707 43 34	Option

Also available on request: threaded ports 1 1/2" and 2".

Ready to be mounted
The products are delivered with following accessories:

- 1 gauge
- 1 bracket (sizes 1/4, 3/8, 1/2) or 2 brackets (sizes 3/4, 1").
- 4 screws
- 1 plug