

NYLON CHECK VALVES


NYLON SPRING CHECK VALVE F/F BSP

> Spring loaded > Non-corrosive > High flow > Robust design

	SIZE INCH		SIZE MM	W.P. PSI	PART No.
	¾		20	200	ACV20
	1		25	200	ACV25
	1¼		32	200	ACV32
	1½		40	200	ACV40
	2		50	200	ACV50

MATERIAL

Body > glass fibre reinforced nylon
Spring > stainless steel
Plunger > nylon
Washer > nitrile rubber
O ring > nitrile rubber
Max W.P. > 235 psi @ 20°C

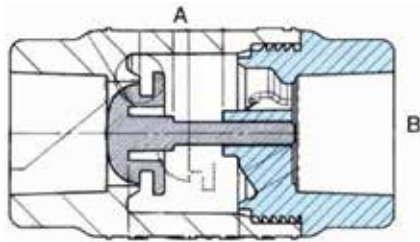

VALVE SIZES

	20MM	25MM	32MM	40MM	50MM
A	85mm	90mm	110mm	122mm	139mm
B	46mm	54mm	64mm	74mm	90mm